# Projection



#### Readings

• Szeliski 2.1


# Projection



#### Readings


• Szeliski 2.1

# Müller-Lyer Illusion

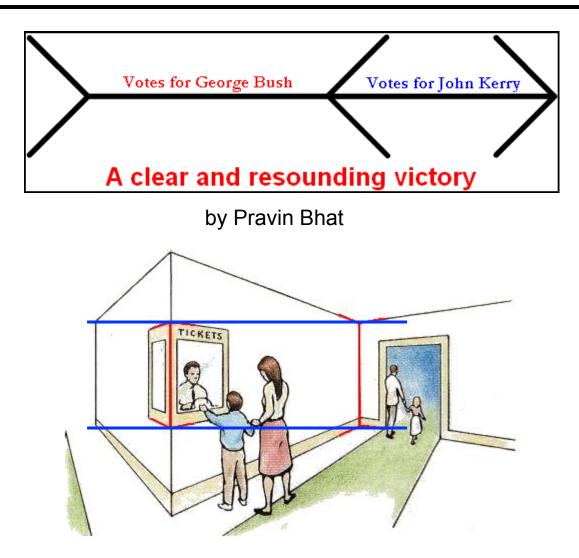

http://www.michaelbach.de/ot/sze\_muelue/index.html


## Image formation

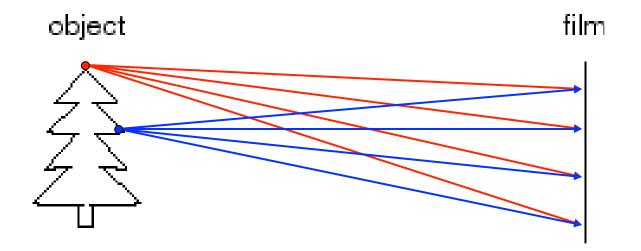

Let's design a camera

- Idea 1: put a piece of film in front of an object
- Do we get a reasonable image?


## Pinhole camera

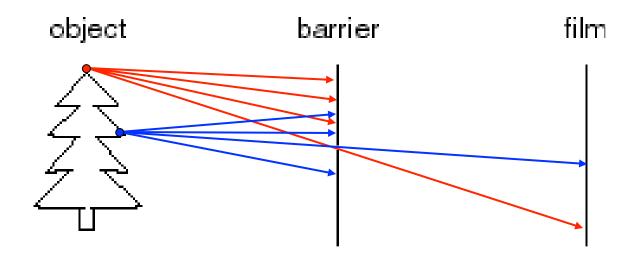

Add a barrier to block off most of the rays

- This reduces blurring
- The opening known as the **aperture**
- How does this transform the image?


### Camera Obscura

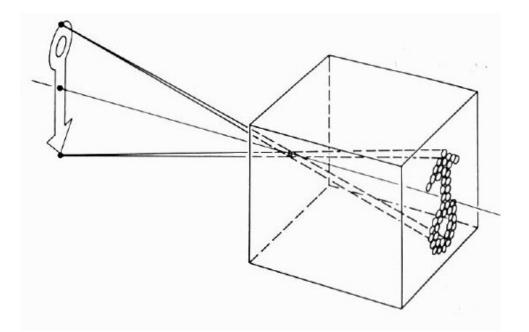

The first camera

- Known to Aristotle
- How does the aperture size affect the image?

## Shrinking the aperture

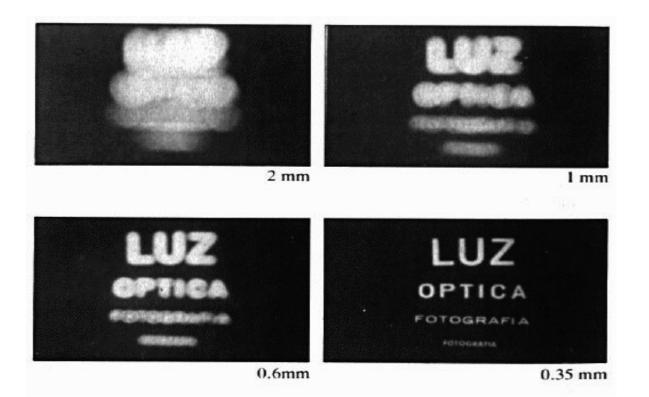


Why not make the aperture as small as possible?

- Less light gets through
- Diffraction effects...


### Shrinking the aperture



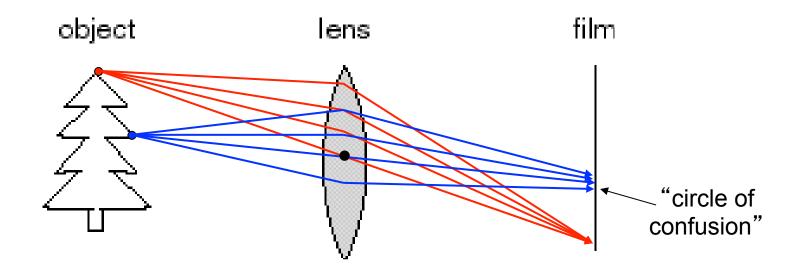

A lens focuses light onto the film


- There is a specific distance at which objects are "in focus"
  - other points project to a "circle of confusion" in the image
- Changing the shape of the lens changes this distance

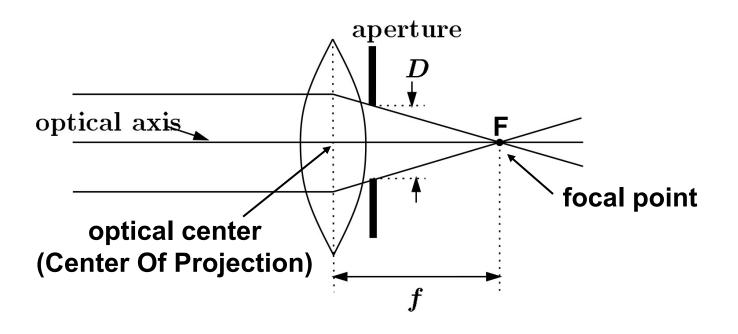


A lens focuses parallel rays onto a single focal point

- focal point at a distance *f* beyond the plane of the lens
  - f is a function of the shape and index of refraction of the lens
- Aperture of diameter D restricts the range of rays
  - aperture may be on either side of the lens
- Lenses are typically spherical (easier to produce)

# Thin lenses

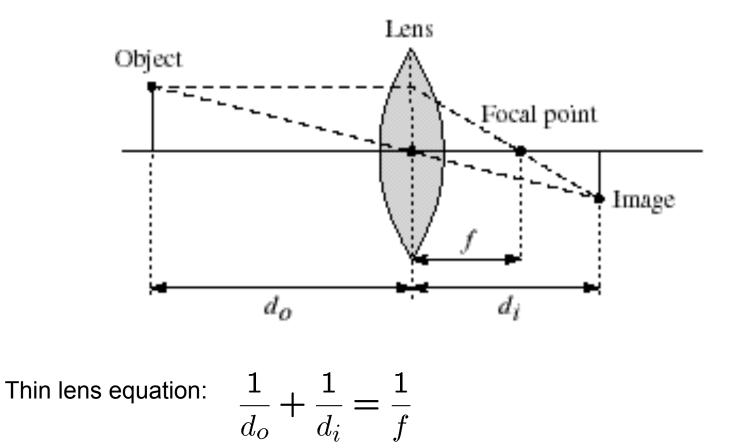

- · Any object point satisfying this equation is in focus
- What is the shape of the focus region?
- How can we change the focus region?
- Thin lens applet: <u>http://www.phy.ntnu.edu.tw/java/Lens/lens\_e.html</u> (by Fu-Kwun Hwang )

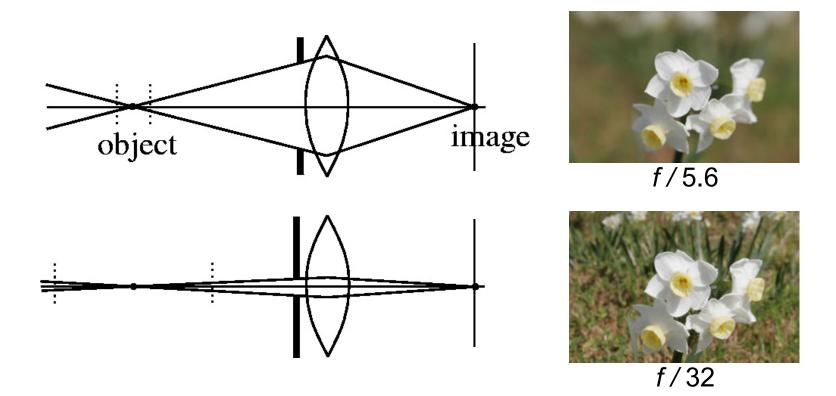


Changing the aperture size affects depth of field

• A smaller aperture increases the range in which the object is approximately in focus

Flower images from Wikipedia <u>http://en.wikipedia.org/wiki/Depth\_of\_field</u>

# The eye

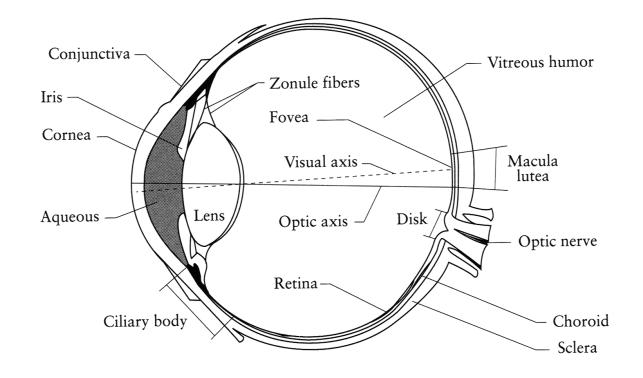

#### The human eye is a camera

- Iris colored annulus with radial muscles
- **Pupil** the hole (aperture) whose size is controlled by the iris
- What's the "film"?
  - photoreceptor cells (rods and cones) in the retina

# Digital camera



A digital camera replaces film with a sensor array

- Each cell in the array is a Charge Coupled Device
  - light-sensitive diode that converts photons to electrons
  - other variants exist: CMOS is becoming more popular
  - <u>http://electronics.howstuffworks.com/digital-camera.htm</u>

# Issues with digital cameras

Noise

- big difference between consumer vs. SLR-style cameras
- low light is where you most notice <u>noise</u>

Compression

- creates artifacts except in uncompressed formats (tiff, raw)

Color

- <u>color fringing</u> artifacts from <u>Bayer patterns</u>

Blooming

- charge <u>overflowing</u> into neighboring pixels

In-camera processing

- oversharpening can produce halos
- Interlaced vs. progressive scan video
  - <u>even/odd rows from different exposures</u>
- Are more megapixels better?
  - requires higher quality lens
  - noise issues


Stabilization

- compensate for camera shake (mechanical vs. electronic)

More info online, e.g.,

- <u>http://electronics.howstuffworks.com/digital-camera.htm</u>
- <u>http://www.dpreview.com/</u>


# Modeling projection

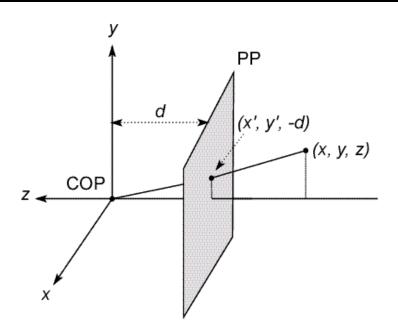

The coordinate system

- We will use the pin-hole model as an approximation
- Put the optical center (Center Of Projection) at the origin
- Put the image plane (**P**rojection **P**lane) *in front* of the COP
  - Why?
- The camera looks down the *negative* z axis
  - we need this if we want right-handed-coordinates

# Modeling projection

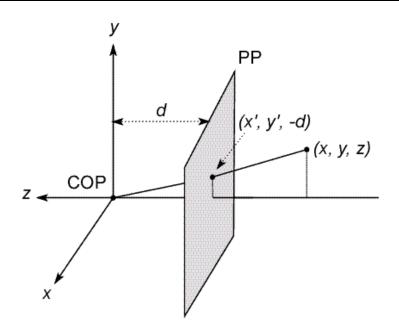

**Projection equations** 

- Compute intersection with PP of ray from (x,y,z) to COP
- Derived using similar triangles (on board)

$$(x, y, z) 
ightarrow (-drac{x}{z}, -drac{y}{z}, -d)$$

• We get the projection by throwing out the last coordinate:

$$(x, y, z) \rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

### Homogeneous coordinates

Is this a linear transformation?

no—division by z is nonlinear

Trick: add one more coordinate:

$$(x,y) \Rightarrow \left[ egin{array}{c} x \\ y \\ 1 \end{array} 
ight]$$

homogeneous image homogeneous scene coordinates

$$(x, y, z) \Rightarrow \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

coordinates

Converting from homogeneous coordinates

$$\begin{bmatrix} x \\ y \\ w \end{bmatrix} \Rightarrow (x/w, y/w) \qquad \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix} \Rightarrow (x/w, y/w, z/w)$$

### **Perspective Projection**

Projection is a matrix multiply using homogeneous coordinates:

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

divide by third coordinate

#### This is known as perspective projection

- The matrix is the **projection matrix**
- Can also formulate as a 4x4 (today's reading does this)

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ z \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

divide by fourth coordinate

### **Perspective Projection**


How does scaling the projection matrix change the transformation?

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$
$$\begin{bmatrix} -d & 0 & 0 & 0 \\ 0 & -d & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} -dx \\ -dy \\ z \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

# Orthographic projection

Special case of perspective projection

• Distance from the COP to the PP is infinite

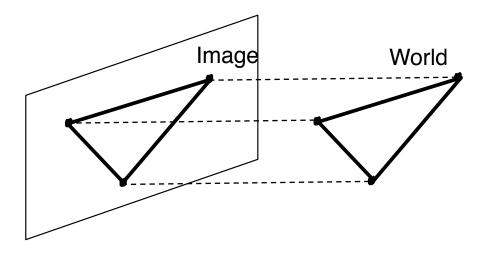


- Good approximation for telephoto optics
- Also called "parallel projection":  $(x, y, z) \rightarrow (x, y)$
- What's the projection matrix?

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \Rightarrow (x, y)$$

# Orthographic ("telecentric") lenses



Navitar telecentric zoom lens

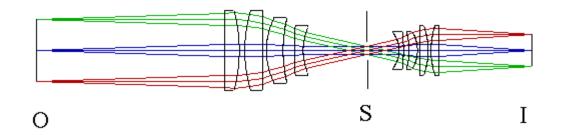

http://www.lhup.edu/~dsimanek/3d/telecent.htm

# Variants of orthographic projection

Scaled orthographic

• Also called "weak perspective"

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1/d \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 1/d \end{bmatrix} \Rightarrow (dx, dy)$$

Affine projection

• Also called "paraperspective"

$$\begin{bmatrix} a & b & c & d \\ e & f & g & h \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

# Camera parameters

A camera is described by several parameters

- Translation T of the optical center from the origin of world coords
- Rotation R of the image plane
- focal length f, principle point (x' <sub>c</sub>, y' <sub>c</sub>), pixel size (s<sub>x</sub>, s<sub>y</sub>)
- blue parameters are called "extrinsics," red are "intrinsics"

**Projection equation** 

$$(x'_c, y'_c)$$


- The projection matrix models the cumulative effect of all parameters
- Useful to decompose into a series of operations

identity matrix

$$\boldsymbol{\Pi} = \begin{bmatrix} -fs_x & 0 & x'_c \\ 0 & -fs_y & y'_c \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{R}_{3x3} & \mathbf{0}_{3x1} \\ \mathbf{0}_{1x3} & 1 \end{bmatrix} \begin{bmatrix} \mathbf{I}_{3x3} & \mathbf{T}_{3x1} \\ \mathbf{0}_{1x3} & 1 \end{bmatrix}$$
  
intrinsics projection rotation translation

- The definitions of these parameters are **not** completely standardized
  - especially intrinsics-varies from one book to another

### Distortion

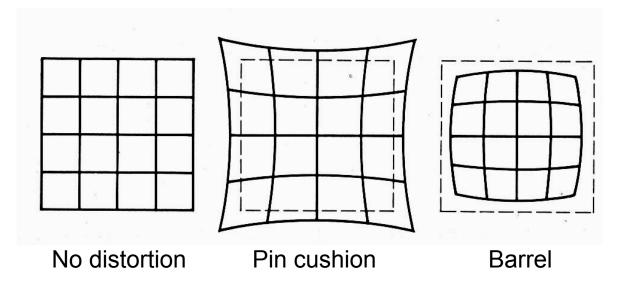

#### Radial distortion of the image

- Caused by imperfect lenses
- Deviations are most noticeable for rays that pass through the edge of the lens


### Correcting radial distortion






from Helmut Dersch

# Distortion

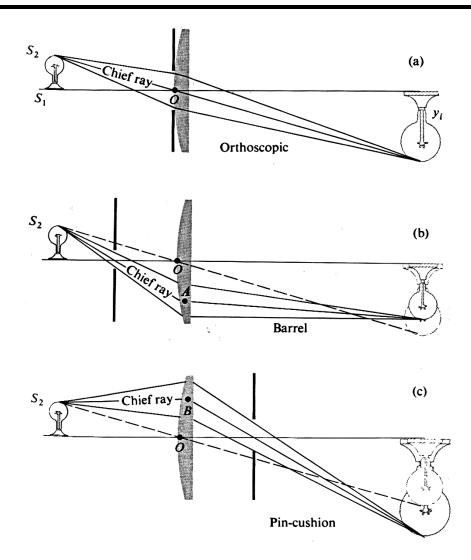

# Modeling distortion

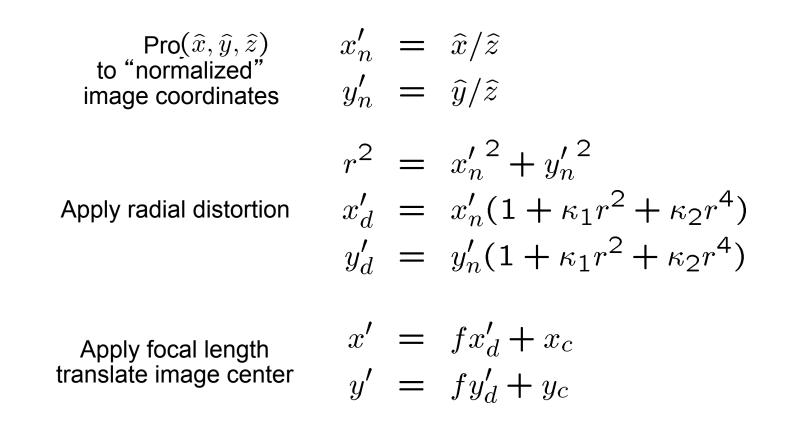

#### To model lens distortion

 Use above projection operation instead of standard projection matrix multiplication

# Other types of projection

Lots of intriguing variants... (I'll just mention a few fun ones)

### 360 degree field of view...



#### **Basic** approach


- Take a photo of a parabolic mirror with an orthographic lens (Nayar)
- Or buy one a lens from a variety of omnicam manufacturers...
  - See <u>http://www.cis.upenn.edu/~kostas/omni.html</u>

# Tilt-shift



http://www.northlight-images.co.uk/article\_pages/tilt\_and\_shift\_ts-e.html



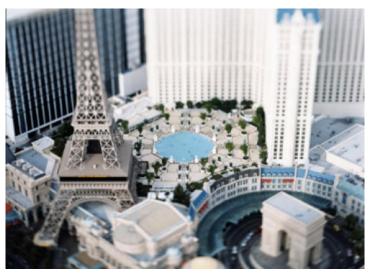

Titlt-shift images from <u>Olivo Barbieri</u> and Photoshop <u>imitations</u>

### Rotating sensor (or object)



Rollout Photographs © Justin Kerr http://research.famsi.org/kerrmaya.html

Also known as "cyclographs", "peripheral images"

# Photofinish

