

Visible Surface Detection (V.S.D)

(Chapt. 15 in FVD, Chapt. 13 in Hearn & Baker)

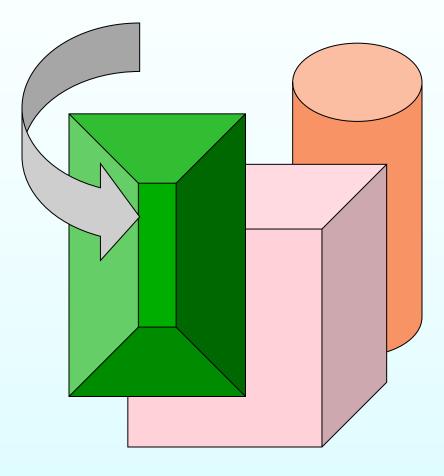


- Given a set of 3D objects and a viewing specifications, determine which lines or surfaces of the objects should be visible.
- A surface might be occluded by other objects or by the same object (self occlusion)
- Two main approaches:
 - Image-precision algorithms: determine what is visible at each pixel.
 - Object-precision algorithms: determine which parts of each object are visible.

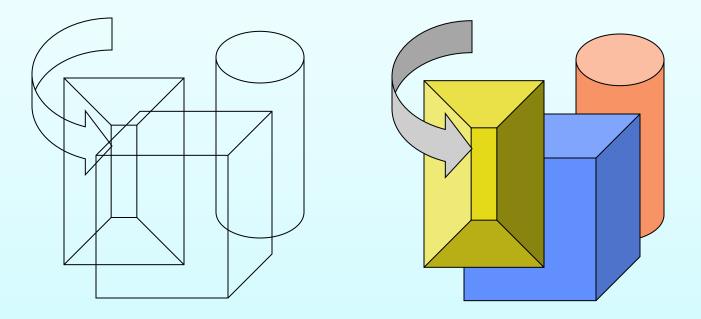


Coherence

- Most methods for V.S.D. use coherence features in the surface:
 - Object coherence.
 - Face coherence.
 - Edge coherence.
 - Scan-line coherence.
 - Depth coherence.
 - Frame coherence.

Single Valued Function of two variables

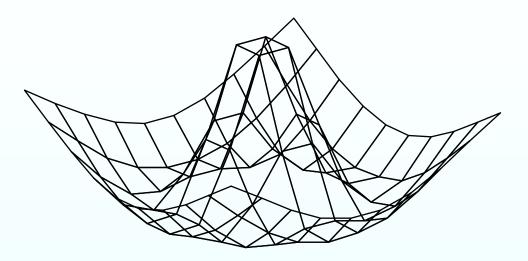

Without Hidden-Line Removal

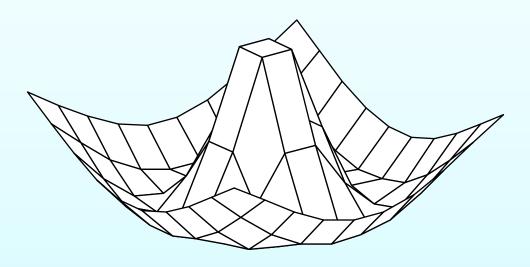

With Hidden-Line Removal


Floating Horizon Algorithm

- Implicit Function: Y=f(X,Z).
- Represent as 2D array of x and z values, each entry is the corresponding y-value.
- Surface = many polylines; Each polyline is constant in Z.


<u>Algorithm:</u>

Draw polylines of constant z from front (near z) to back (far z).

Draw only parts of polyline that are visible: ie above/below the silhouette (horizon).

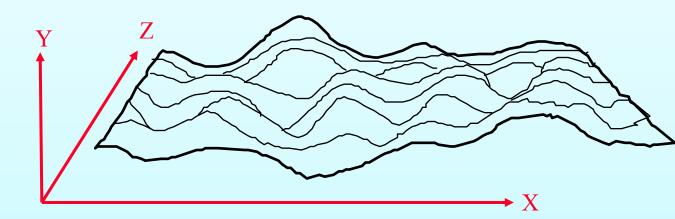


Use 2 1D arrays YMIN and YMAX (with 1 entry for each x). When drawing a polyline of constant z, for each x-value, test if above/below YMAX/YMIN (at x location) and update arrays.

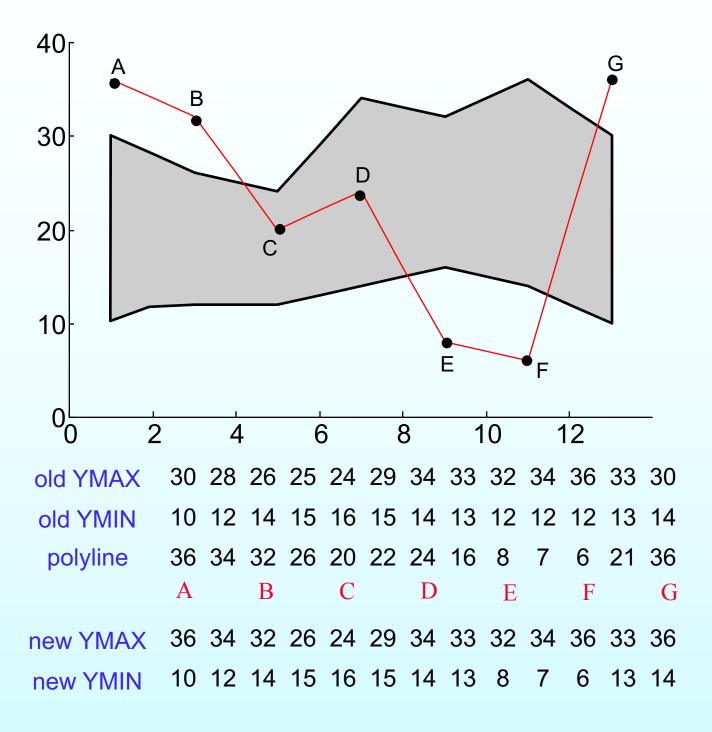


- <u>Floating Horizon Characteristics</u>:
 - Applied in image space (image precision).
 - Limited to explicit functions only.
 - Exploiting edge coherence.
 - Applicable for free-form surfaces.


Back Face Detection

- **Observation**: In a volumetric object, you never see the "back" faces of the object (self occlusion).
- Reminder:
 - Plane equation: Ax+By+Cz+D=0
 - $N = [A,B,C]^T$ is the plane normal.
 - N points "outside".
- Back facing and front facing faces can be identified using the sign of V•N
- In which coordinates N is represented?

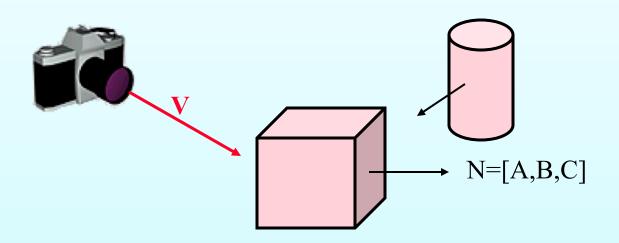

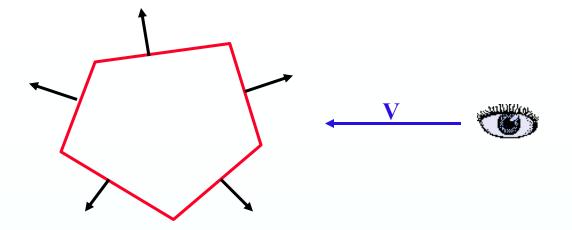


- Three possibilities:
 - $V \cdot N > 0$ back face
 - $V \cdot N < 0$ front face
 - $V \bullet N = 0$ on line of view
- For convex objects, *back face detection* actually solves the *visible surfaces problem*.
- Back face detection is easily applied to convex polyhedral objects.
- In a general object, a front face can be visible, invisible, or partially visible.

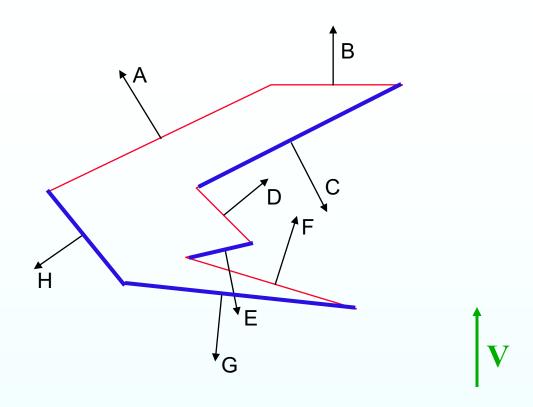


Back Face Polygons: A, B, D, F Front Face Polygons: C, E, G, H

Depth-Buffer Method (Z-Buffer)

- In addition to the frame buffer (keeping the pixel values), keep a Zbuffer containing the depth value of each pixel.
- Surfaces are scan-converted in an arbitrary order. For each pixel (x,y), the Z-value is computed as well. The (x,y) pixel is overwritten only if its Z-values is closer to the viewing plane than the one already written at this location.

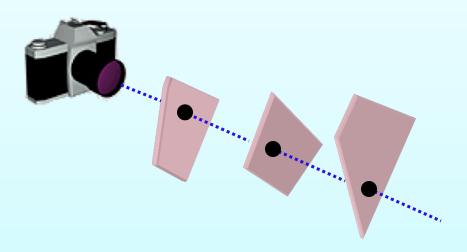

Example of Compositing surfaces Using Z-Buffer

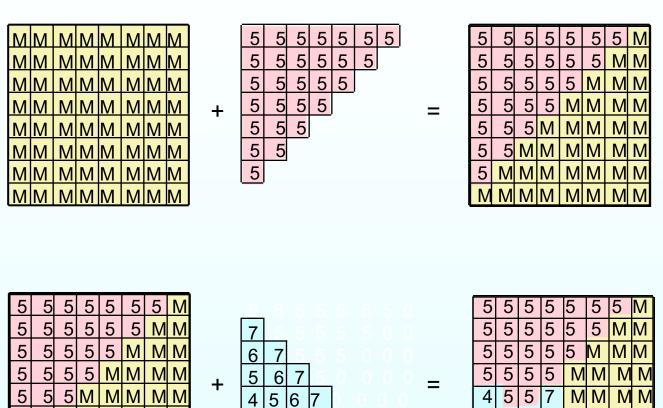

7	5	5				
6	7	5	5			
5	6	7	5	0		
4	5	6	7	D	0	
3	4	5	6	7	0	
2	3	4	5	6	7	

5

5

5 M M

MMM

MMM

MM

Μ

MM

MM

N

M

7

MM

6

3

45

3

MMM

6

M

4 5

Algorithm:

- Initialize the z-buffer and the frame-buffer:
 depth(x,y)=MAX_Z; I(x,y)=I_{background}
- Calculate the depth Z for each (x,y) position on any surface:
 - If z<*depth*(x,y), then set

depth(x,y)=z; $I(x,y)=I_{surf}(x,y)$

- For polygon surfaces, the depth-buffer method is very easy to implement using polygon scan line conversion, and exploiting face coherence and scan-line coherence :
 - Z = -(Ax+By+D)/C
 - Along scan lines
 Z'= -(A(x+1)+By+D)/C=Z-A/C
 - Between successive scan lines:


Z' = -(Ax+B(y+1)+D)/C=Z-B/C

Depth-Buffer Characteristics


- Implemented in the image space.
- Very common in hardware due its simplicity.
- 32 bits per pixel for *Z* is common.
- Advantages:
 - Simple and easy to implement.
- Disadvantages:
 - Requires a lot of memory.
 - Finite depth precision can cause problems.
 - Might spend a lot of time rendering polygons that are not visible.
 - Requires re-calculations when changing the objects scale.

Depth Sort (Painter Algorithm)


- Sort all of the polygons in the scene by their depth.
- Draw them back to front.
- **Question**: Does a depth ordering always exist?
- Answer: Unfortunately, no!
- For polygons with constant *Z* value, this sorting clearly works.
- For example: VLSI design, or in window systems.

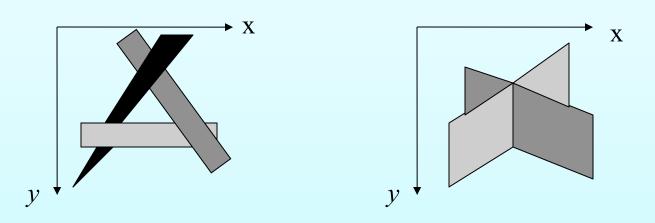

- **Question**: What if polygons are not *Z* constant?
- Given two polygons P and Q, an order may be determined between them, if at least one of the following holds:
 - *1. Z* values of P and Q do not overlap.
 - The bounding rectangle in the x,y plane for P and Q do not overlap.
 - 3. P is totally on one side of Q's plane.
 - 4. Q is totally on one side of P's plane.
 - 5. The bounding rectangles of Q and P do not intersect in the projection plane.

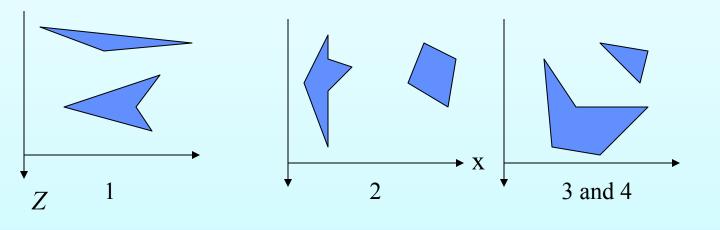


• If all the above conditions do not hold, P and Q may be split along intersection edge into two smaller polygons.

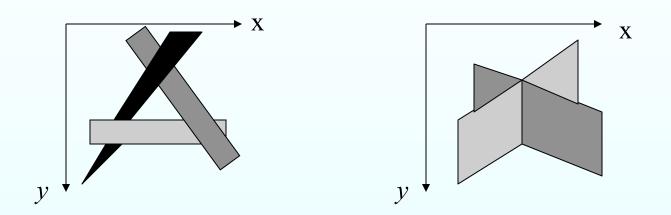

The BSP Tree


- BSP = Binary Space Partitioning.
- Interior nodes correspond to partitioning planes.
- Leaf nodes correspond to convex regions of space.

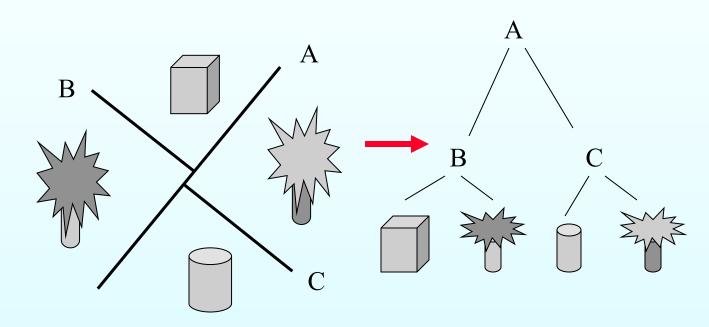


- Tests 3 and 4 in *Depth Sort* technique can be exploited efficiently:
- Let L_p be the plane P lies in: The 3D space may be divided into the following three groups:
 - Polygons in front of L_p .
 - Polygons behind L_p.
 - Polygons intersecting L_p.
- Polygons in the third class are split, and classified into the first two.
- As a result of the subdivision with respect to L_p:
 - The polygons behind L_p cannot obscure P, so we can draw them first.
 - P cannot obscure the polygons in front of L_p so we can draw P second.
 - Finally we draw the polygons in front of P.

The BSP-Tree Algorithm

- Construct a BSP tree:
 - Pick a polygon, let its supporting plane be the root of the tree.
 - Create two lists of polygons: these in front, and those behind (splitting polygons as necessary).
 - Recurse on the two lists to create the two sub-trees.
- Display:
 - Traverse the BSP tree back to front, drawing polygons in the order they are encountered in the traversal.

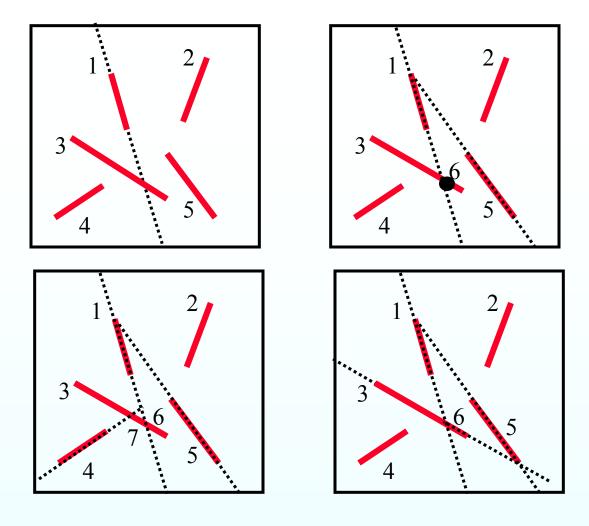

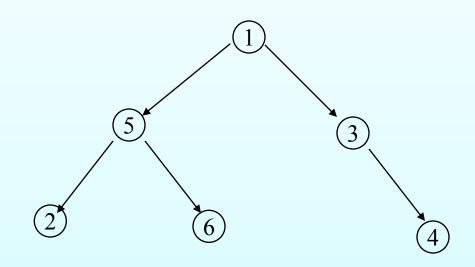


BSP Properties:


- The BSP tree is *view independent*!
- The BSP tree is constructed using the geometry of the object only.
- The tree can be used for hidden surface removal at an arbitrary direction.
- BSP = Object-precision alg.

Area Subdivision Technique (Warnock 1969)

- Subdivide screen area recursively, until visible surfaces are easy to determine.
- Each polygon has one of four relationships to the area of interest:

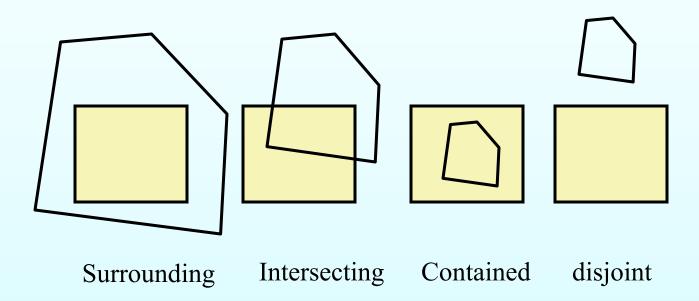


- If all polygons are disjoint from the area, fill area with background color.
- Only one intersecting or contained polygon: First fill with background color, then scan convert polygon.
- Only one surrounding polygon: Fill area with polygon's color.
- More than one polygon is surrounding, intersecting, or contained, but one surrounding polygon is in front of the rest: Fill area with polygon's color.
- If none of the above cases occurs: Subdivide area into four, and recurse.
- Area subdivision = Image precision technique.

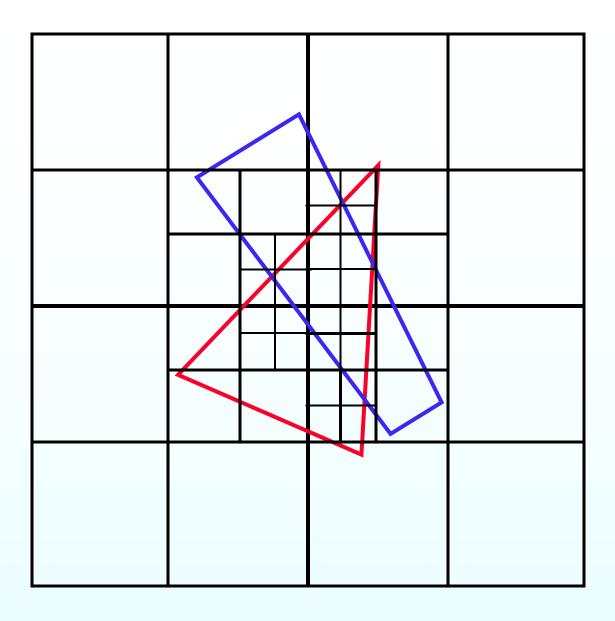


When the resolution of the image is reached, polygons are sorted by their Zvalues at the center of the pixel, and the color of the closest polygon is used.

Quantitative Visibility

• First general hidden surface algorithm, by Appel 1967.

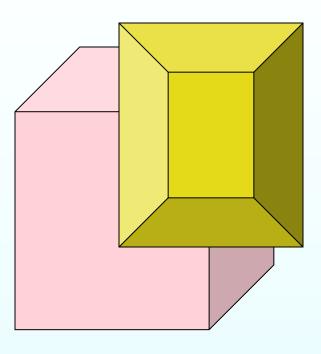


• **Definition**: Every edge has a nonnegative *quantitative visible value*, Q_v , which corresponds to the number of times the edge is obscured. If $Q_v=0$ the edge is visible. • **Definition**: An *active edge* is a silhouette edge, i.e, it is shared by *back* and *front* faces.

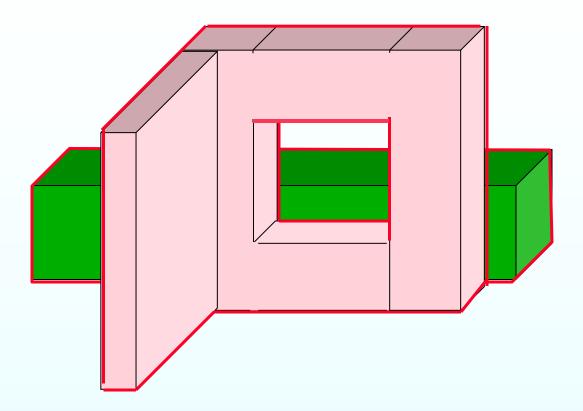

- **Observations**: The visibility of an edge can be changed only where it intersects another *active* edge in the viewing plane.
- If the edge does not intersect any *active* edge, its visibility is homogeneous.

- Algorithm:
 - Select a single point on line and test how many polygons obscure it.
 - Increment/decrement Q_v any time the line intersects an active edge, and the intersection is inside the view triangle.
 - Propagate from the end point to a neighboring line.
 - Fill the resulting polygons appropriately.
- Question: How do we know if the line "enter" or "leave" an obscuring face?

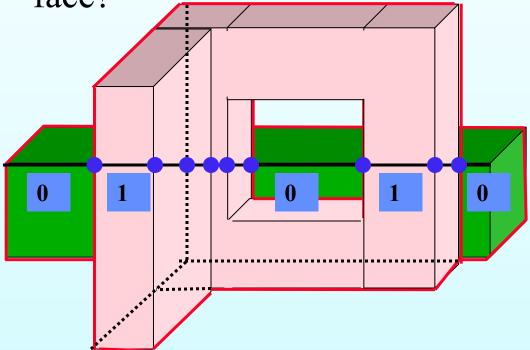

- Answer: Edges of a polygon are described counter-clockwise when viewing the object from "outside" (so the face is to the left).
- We test the configuration of the line direction with the direction of intersecting edge describing the front face.

